

BI FOLDING DOOR STANDARD SPECIFICATION

REHAU S706

- 2 – 7 door opening combinations
- Inward Opening
- Outward Opening
- Colour Options:
 - White
 - Golden Oak Outside-on-Golden Oak Inside
 - Golden Oak Outside-on-White Inside
 - Mahogany Outside-on-Mahogany Inside
 - Mahogany Outside-on-White Inside
 - Rosewood Outside-on-Rosewood Inside
 - Rosewood Outside-on-White Inside
- Cill Options: 95mm / 150mm / 180mm / 225mm
- Triple chambered profile to ensure good thermal insulation
- Fully reinforced to Rehau specification
- Internally glazed for easy-on-site glazing and improved security
- Profile is difficult to ignite and will self extinguish when source of heat is removed
- Low maintenance – will not warp, rot, or need regular painting
- Durability – provides excellent resistance to weathering and ageing for many years
- Pre-routed steel on locking side ensures continuous reinforcement
- Slim sightlines providing maximum glass area for optimum visibility

THRESHOLD OPTIONS

- Standard Threshold (*see diagram 1a & 1b*)
- Standard with 95mm Projection Cill
- Standard with 150mm Projection Cill
- Standard with 180mm Projection Cill
- Standard with 225mm Projection Cill
- Aluminum Threshold (*see diagram 2*)

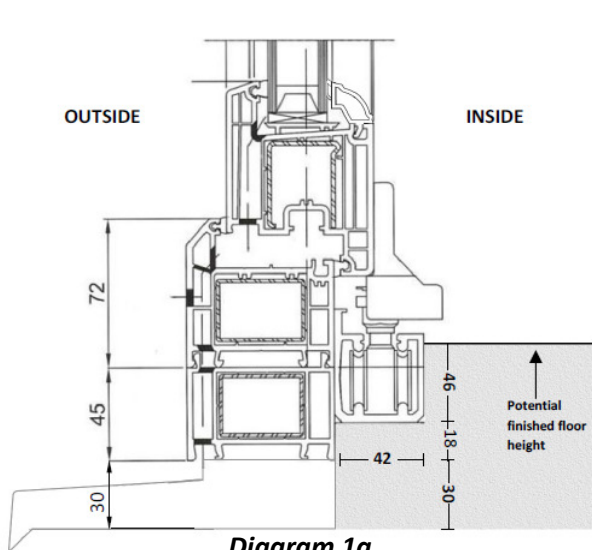


Diagram 1a
Standard Threshold for Open IN doors

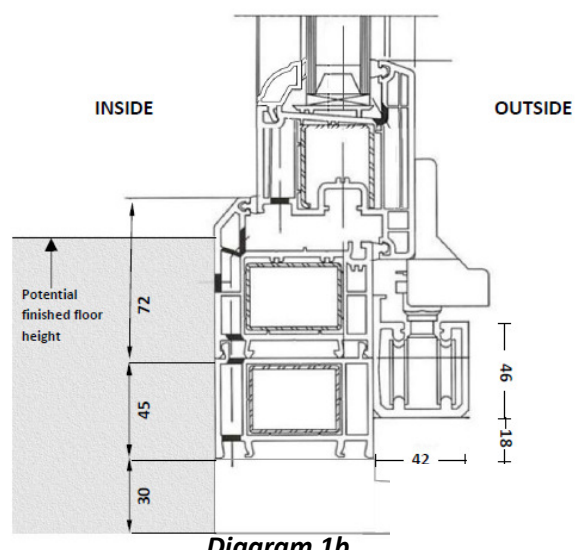


Diagram 1b
Standard Threshold for Open OUT doors

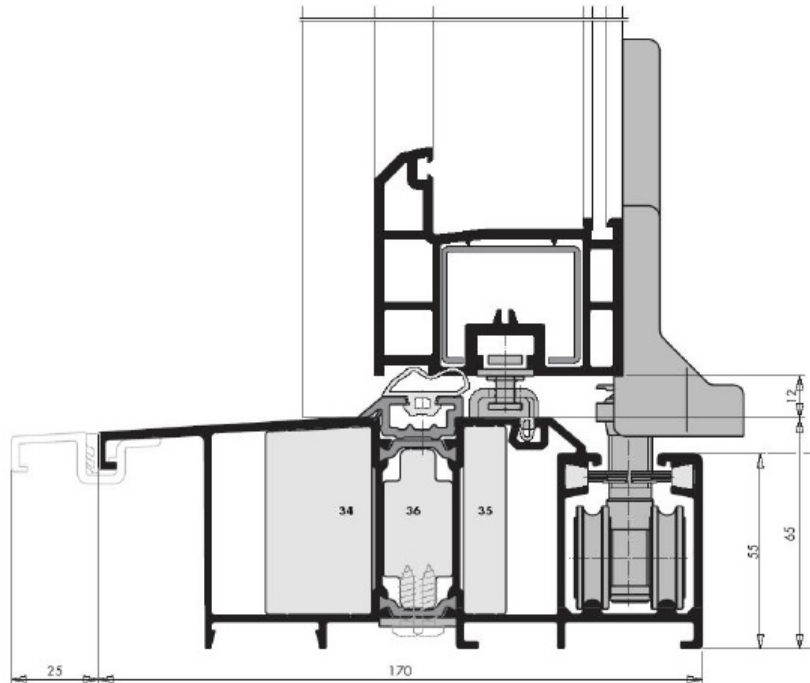


Diagram 2

Aluminium Threshold (Available on Open IN doors only)

FRAME EXTENSION PROFILES

- Standard Specification
 - **Open IN*** Bi-Fold doors will have a 45mm extension fitted to the bottom of the outer frame, a 15mm extension fitted to the top of the frame and a 15mm extension fitted to the left and right side of the frame.
*On schemes 220/202, 440/404, 660/606 an additional 15mm extension will be fitted to the closing side of the frame.
 - **Open OUT** Bi-Fold doors will not have extensions to the sides but will have 15mm extension fitted to the top of the outer frame and a 45mm extension fitted to the bottom of the outer frame.
- Additional extensions can be fitted, or the extensions to the top and sides can be omitted as requested.

GLAZING BEADS

Ovolo shaped beads are fitted as standard, chamfered beads can also be fitted as an option.

Low level glazing gaskets are fitted as standard.

BI FOLDING DOOR STANDARD SPECIFICATION

HARDWARE OPTIONS

- **Door Handles** – the folding doors can be fitted with either white or gold handles, inside only. The master or traffic door can be fitted with handles of the following colours:
 - White
 - Gold
 - Black
 - Silver
 - Polished Chrome

The master or main traffic doors are all fitted with handles inside and out on all schemes with the exception of schemes 220/202, 440/404, 660/606.

- **Cylinders** – Gold or silver cylinders are available to match the handle on the master or traffic door.

Handles and cylinders can be upgraded to anti-bump and/or anti-snap with cylinder guard.